


PN 25 DUCTILE IRON BALANCING VALVE

(Flanged)

STANDARDS	
DESIGN STANDARD	BS EN 558-1 (1)
END CONNECTION	BS EN 1092-2 PN25 / BS 4504 / DIN 2501
END TO END	DIN 3202(1) / BS 5155 / BS 7350 / DIN 3352 / EN 13789
TESTING STANDARD	API 598

Applications: Regulation & Control of Oil and Gas, Hot and Cold Water, Fluids, Air, Steam, Raw and Sea Water

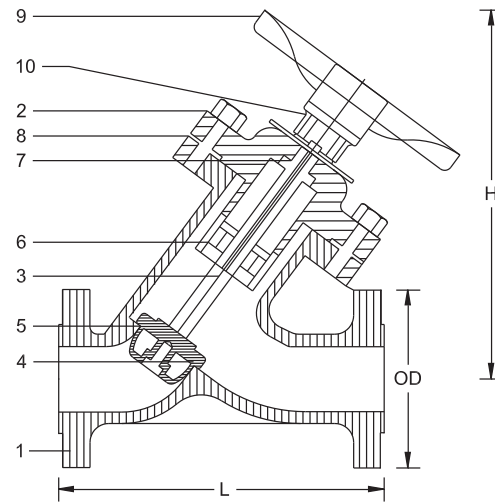

COMPONENT	SPECIFICATIONS
1 BODY	DUCTILE IRON (EN-GJS-400) / GGG40
2 BONNET	DUCTILE IRON (EN-GJS-400) / GGG40
3 STEM	BRONZE C83600
4 DISC	DUCTILE IRON (EN-GJS-400) / GGG40
5 DISC RING	PTFE TEFLON
6 BEARING BUSH	BRONZE C83600
7 O-RING	EPDM – PTFE TEFLON
8 GASKET	ASBESTOS FREE
9 HANDWHEEL	DUCTILE IRON (EN-GJS-400) / GGG40
10 INDICATOR	PVC / ABS

Dimensions in mm

DN	50	65	80	100	125	150	200	250	300
L	230	290	310	350	400	480	600	730	850
OD	165	180	200	235	270	300	360	425	485
H	260	310	340	345	365	415	590	650	670