


PN 25 DUCTILE IRON STRAINER VALVE

(Y-Type)

| STANDARDS | |
|------------------|---|
| DESIGN STANDARD | BS EN 558-1 (1) |
| END CONNECTION | BS EN 1092-2 PN25 / BS 4504 / DIN 2501 |
| END TO END | DIN 3202(1) / EN 13789 / BS 7350 / DIN 3352 |
| TESTING STANDARD | API 598 |

Applications: Regulation & Control of Oil and Gas, Hot and Cold Water, Fluids, Air, Steam, Raw and Sea Water

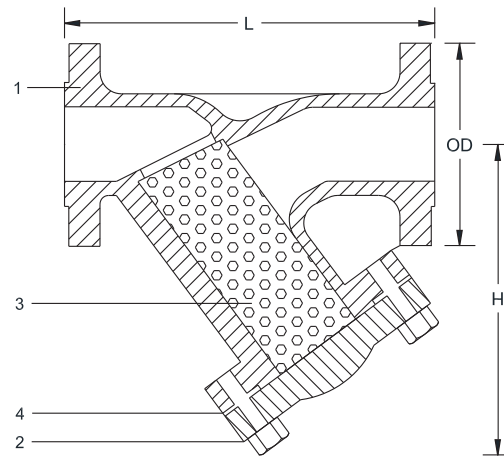

| COMPONENT | | SPECIFICATIONS |
|-----------|--------|-----------------------------------|
| 1 | BODY | DUCTILE IRON (EN-GJS-400) / GGG40 |
| 2 | COVER | DUCTILE IRON (EN-GJS-400) / GGG40 |
| 3 | SCREEN | STAINLESS STEEL 304 |
| 4 | GASKET | NON ASBESTOS SHEET |

Dimensions in mm

| DN | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| L | 230 | 290 | 310 | 350 | 400 | 480 | 600 | 730 | 850 | 980 | 1100 | 1200 | 1250 | 1450 |
| OD | 165 | 185 | 200 | 235 | 270 | 300 | 360 | 425 | 485 | 555 | 620 | 670 | 730 | 845 |
| H | 168 | 212 | 242 | 284 | 325 | 370 | 440 | 515 | 600 | 740 | 750 | 800 | 930 | 1050 |